



PCAP TOUCH KIOSK ENCLOSURE

Ideal for Advertising in Retail & Hospitality Environments

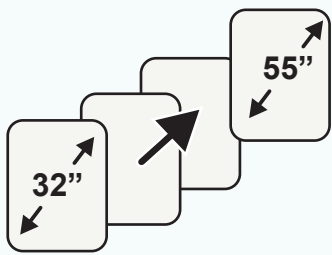

- ✓ Add your choice of LCD Screen
- ✓ Full Black Finished Design
- ✓ RGB LED Side Strip Lights
- ✓ Tempered full Edge to Edge 6mm Glass

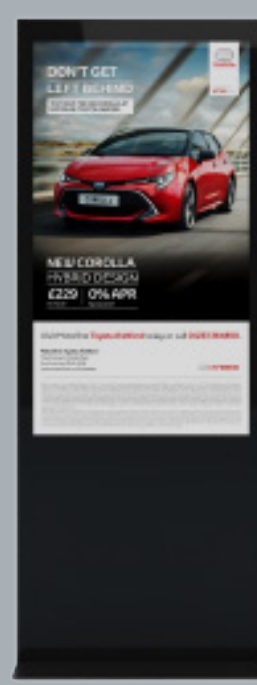

32" to 55" Models

Incredibly sleek, stylish and slim yet extremely visible. Designed to fit a choice of screen sizes: 32" 43" 49" 50" and 55" Vestel and Hisense Displays also LG and Samsung Displays.



Plug & Play (USB)

Vestel & Hiesene Displays Content can be updated easily via USB via the built-in Vestel Media Player. Simply copy and paste your photos & videos onto a USB stick and plug in to the screen. The content will automatically play in a loop.



VESTEL Commercial Grade IPS Panel

Commercial grade 24/7 operation VESTEL IPS Panel, stylish and slim yet extremely visible with a choice of sizes; 32" to 65.



Custom RAL Finish & Logo

Incorporate your brand colour scheme & logo into the Kiosk design. With a LED Colour RGB side Strip choice of custom RAL Paint Finish and glass

Key Features

- Integrated Castor Wheels
- Internal Locker With AV Inputs
- 24/7 Commercial Use
- RGB LED Side Strip Lighting
- Touch Screen

Available Add-ons

- SONY 210W Powered Speakers
- HD Camera
- Windows or Android Media Player
- LED Backlit Printed Logo on Bottom Glass





Easy Portability with a Tilt and Push Design and Grab Handles


The Advertising Kiosk is the perfect solution for large venues or offices where easy portability is key. Simply tilt the kiosk back onto the integrated castor wheels and push to a new destination. This makes it the perfect solution for events, offices and road shows.



Secure Internal Locker for Media Player Connection

Secure Internal Locker with VESA Mounts for Small Form Factor PC and mounting bracket for a Larger PC case. Easily connect to the built in Faceplate which features; 2 x 240V UK Plug Sockets, HDMI & VGA Inputs, RCA Component Sockets, RJ45 Network Socket, 3.5mm Audio and USB Port.

Kiosk Upgrade Extra's

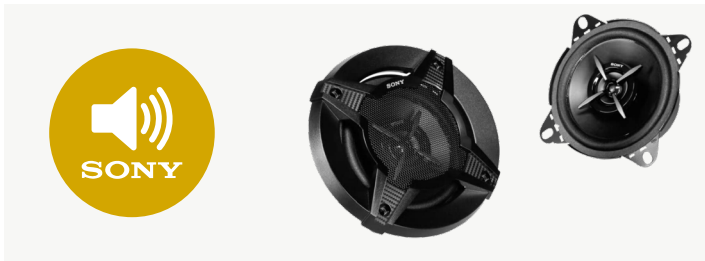

Built in High Quality Sony Speakers & Bluetooth Amplifier

Built in Ultra-slim Profile With Built-in Android Player OS7.1 A total solution 210W Sony Speakers for Impressive Sound and Volume Quality , with a built in NOB Sound Bluetooth Powered Amplifier you can integrate beautiful audio for your touch or signage applications. Fully integrated with the AV Faceplate, simply connect by Bluetooth or AUX.




Upgrade to the Ultra-Slim Profile 700nit Vestel QP Range Panel

New for 2022 is the PR-Range of Vestel Displays, boasting an impressive 700Nit panel brightness and Ultra-Slim profile, making the special edition a premium and slimmer profile unit.

Built in System on Chip Android 8.0 Player by Hisense

The Kiosk built using the latest Hisense E Series Range of LCD panel offers Android 8.0 built in media player. Run your own Android application or partner with one of our CMS systems to remote upload and schedule content via the cloud. You can also upgrade to an OPS player or Intel NUC Windows PC if you have.




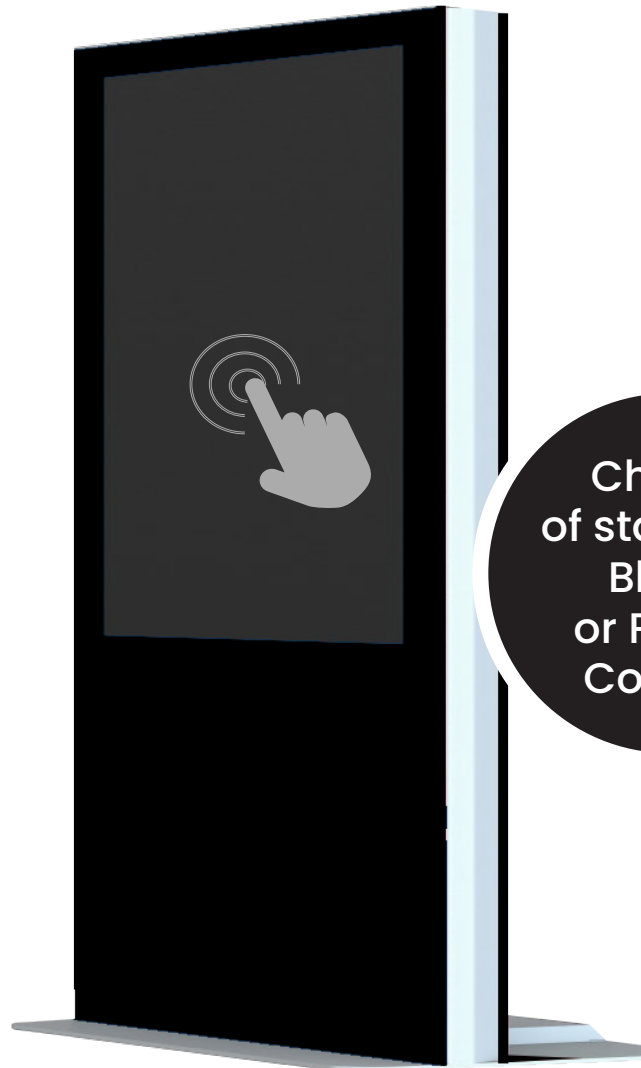

Choice
of standard
Black
or Pastel
Colours



Size		50"	55"	65"
Audio	Speaker Type	Stereo 2 X 10W, 8Ω	Stereo 2 X 10W, 8Ω	Stereo 2 X 10W, 8Ω
AV Inputs	Video	HDMI,VGA, DVI	HDMI,VGA, DVI	HDMI,VGA, DVI
	Audio	Audio Socket (3.5mm)	Audio Socket (3.5mm)	Audio Socket (3.5mm)
Power	Power Consumption (W)	95 W	105 W	74 W
	Input Voltage	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz
Mechanical	Unit Size (HxWxDmm)	1864 x 723 x 450 Base	1870 x 810 x 450 Base	1870 x 960 x 450 Base
	Package Size (HxWxDmm)	Pallet Size VERTICAL DELIVERY		Pallet Size VERTICAL DELIVERY
	Net Weight (kg)	73 kg	79 kg	93 kg
	Gross Weight (kg)	79 kg	85 kg	98 kg
Environmental	Operating Temperature	0-40°C	0 -40 °C	+40°C / 0°C
	Storage Temperature	0 °C to 50 °C	0 °C to 50 °C	0 °C to 50 °C
	Operating Humidity	-30°C to 60°C	-30°C to 60°C	-30°C to 60°C
	Storage Humidity	10% to 80%	10% to 80%	90%
	Regulatory Approvals	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI

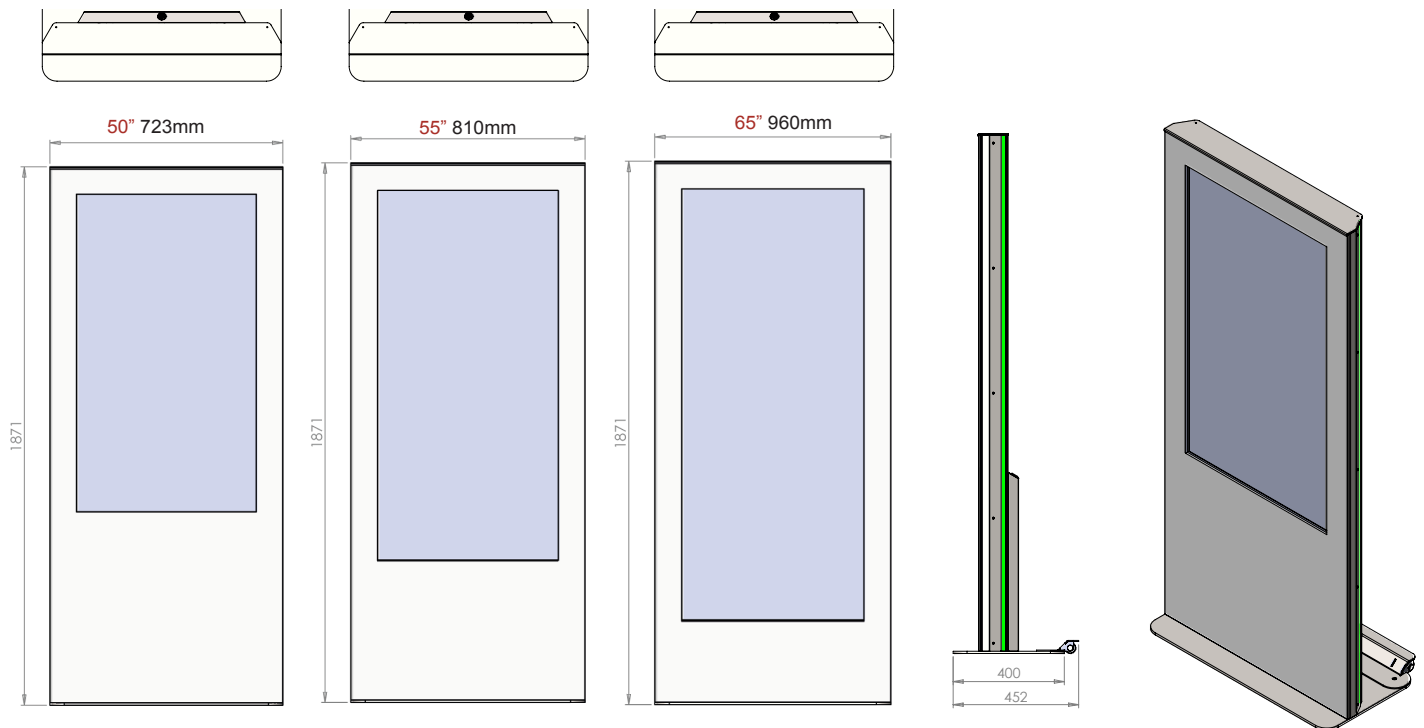

Size						
	PR43	PR50	PR55	PR65	PN43	PN50
Screen Size	43"	50"	55"	65"	43"	50"
Backlight	S-DLED					
Brightness	700cd/m2 (typ.)					
Resolution	3840 x 2160 (UHD)					
Contrast Ratio	1200:1 (typ.)	5000:1 (typ.)	1200:1 (typ.)		5000:1 (typ.)	
Dynamic Contrast	70000:1			50000:1		
Lifetime	50000 Hours (min.)					
Response	8 ms (typ.)	9.5 ms (typ.)	8 ms (typ.)			9.5 ms (typ.)
Active Area	941 x 530mm	1095 x 616mm	1210 x 680mm	1428 x 804mm	941 x 530mm	1095 x 616mm
View Angle	178 Vertical, 178 Horizontal					
Colour Value	1.07B (8-Bit+FRC)	1.07B	1.07B (8-Bit+FRC)		1,07B	
Screen Treatment	3H					
Haze Level	1%	3%	1%		3%	
Screen Treatment	3H					
Haze Level	1%	3%	1%		3%	
Refresh Rate	60 Hz					
Orientation	Horizontal/Vertical					
Operation	24/7					
Usage	Indoor					
Connectivity						
	PR43	PR50	PR55	PR65	PN43	PN50
Video Input	4 x HDMI, 1 x USB				2 x HDMI, 3 x USB	
Video Output	1 x HDMI				2 x HDMI, 3 x USB	
Audio Input	Line In L/R					
Audio Output	Headphone, Optic SPDIF					
External Control	RS232, Ethernet (RJ45)					
External Sensor	RJ12					
Network	WiFi, Ethernet (RJ45)					